

DSH63

- Coordination inductors for surge protectors
- For use with the DS series
- 63 A

Electrical Characteristics		
Max. AC operating voltage L-N	*Uc*	500 Vac
Max. load current	*IL*	63 A
Line inductance		15 µH
Internal short circuit protection		no
Internal Thermal protection		no

Mechanical Characteristics		
Connection to Network		screw terminals: 6-35mm²
Format		1-pole modular box
Mounting		Symmetrical rail 35 mm (EN60715)
Housing material		Thermoplastic UL94-V0
Operating temperature		-40/+85°C
Protection rating		IP20
Wiring mode		1 DSH in series on each active wire
Dimensions		See diagram

Part Number	360807

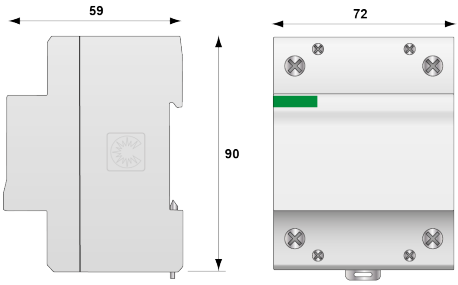

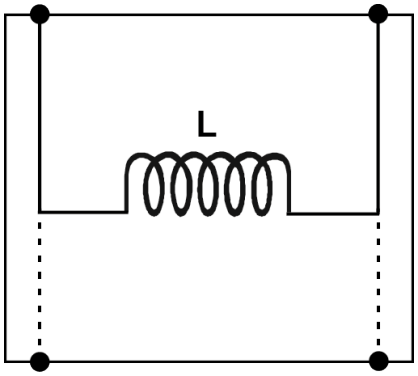

L: Inductor